SARGENT
ASSA ABLOY

ASSA ABLOY, the global leader in door opening solutions

INSTALLATION INSTRUCTIONS FOR GX SERIES LEVER LOCK 3U93 FUNCTION DUMMY TRIM

FOR INSTALLATION ASSISTANCE CALL SARGENT AT 1-800-727-5477 • www.sargentlock.com

INSTALLATION INSTRUCTIONS
Mount lock after door is painted

INSTRUCTIVO DE INSTALACION PARA CERRADURA DUMMY DE MANIJA
Colocar la cerradura una vez pintada la puerta

TOOLS REQUIRED FOR THE LOCK INSTALLATION

Drill
1/8" (3mm) drill bit
Phillips screwdriver
Flat Screwdriver

HERRAMIENTAS UTILZADAS PARA LA INSTALACION DE SU CERRADURA
Taladro
Broca de 1/8" (3mm)
Desarmador Phillips
Desarmador plano

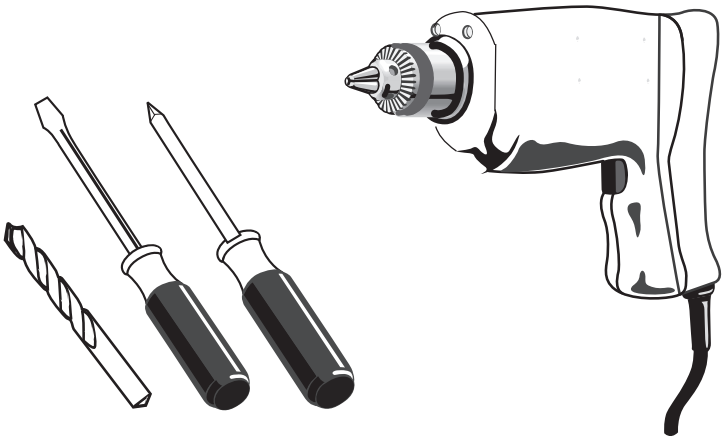

DOOR TEMPLATE

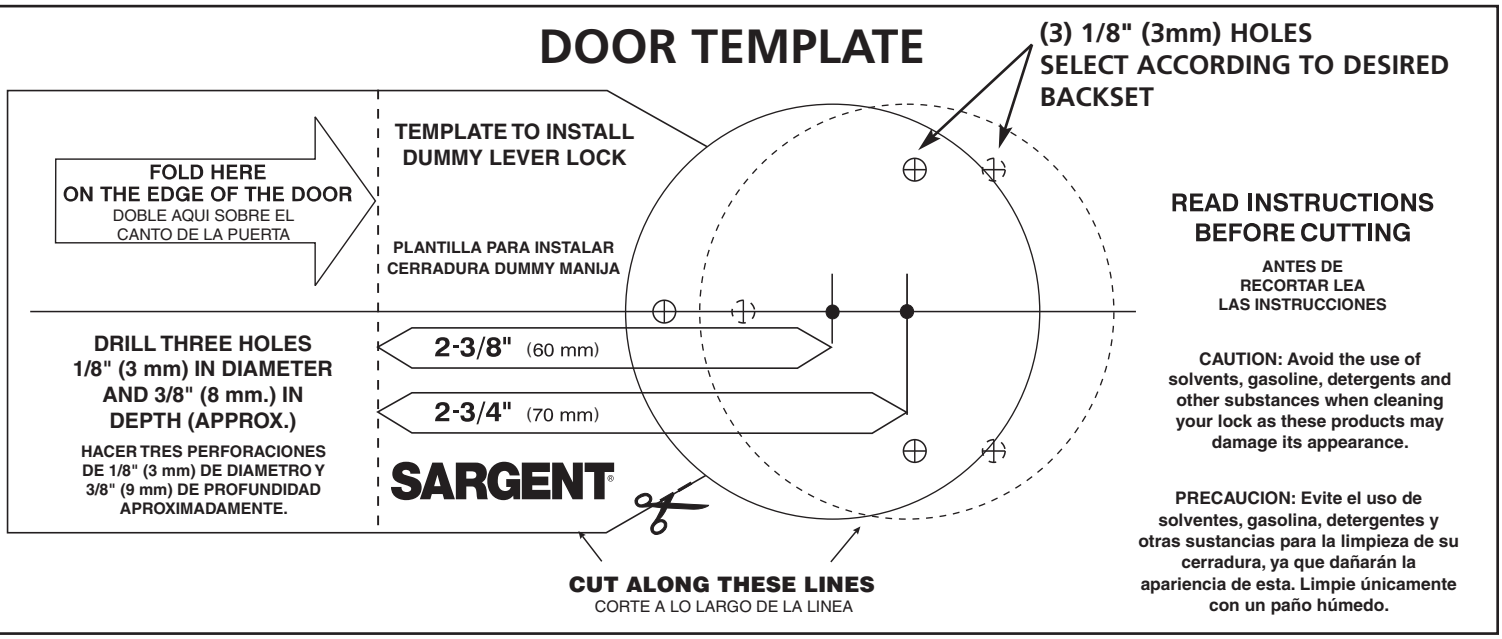

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

A7591A

1 MARK & DRILL HOLES

a) Mark a horizontal line on the face of the door at the height where the lock is to be installed. 38" (956mm) from finished floor is recommended.
b) Place the cutout template as shown and mark the centers of the 3 screw positions. Drill three, 1/8" (3mm) diameter by 3/8" (9mm) deep guide holes where marked.

MARQUE Y HAGA LOS AGUJEROS

a) Marque una lìnea horizontal en la hoja de la puerta a la altura que desee instalar la cerradura, sugerimos 38" (965 mm) del piso.
b) Coloque la plantilla en la forma que indica la figura y marque el centro de los tres cìrculos. Haga los barrenos guìa con una broca de 1/8" (3 mm), con una penetraciòn aproximada de 3/8" (9 mm).



2 DISASSEMBLE LEVER FROM LOCK

a) Remove lever by depressing lever catch on side of lever body.
b) Separate rose from mounting plate by prying apart with flat screwdriver at notch.

DESMARME LA CERRADURA

a) Desmonte la manija con una "punta" ò desarmador plano oprimiendo la cuña alojada en la ranura de la manija.
b) Retire la roseta haciendo palanca en su ranura auxiliandose del desarmador plano.

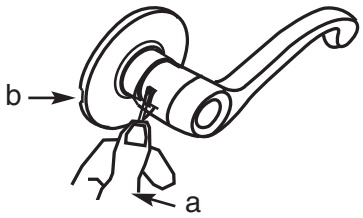

3 INSTALL LOCK MOUNTING PLATE

a) Orient the mounting plate and fasten it with three screws.
b) Replace rose, verifying that its' notch lines up with the spring catch and lateral groove in the mounting plate. Press firmly to attach.

INSTALE LA CERRADURA

a) Oriente la placa de montaje y fìjela con tres tornillos.
b) Coloque la roseta verificando que la muesca de ésta coincida con la ranura lateral del plato y presione.

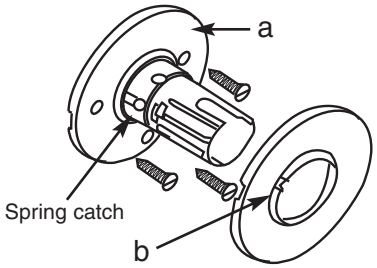

4 REPLACE LEVER

Place lever on spindle and push on.
Verify that lever catch snaps into lever.

COLOQUE LA MANIHJA

Coloque la manija en el poste y empujela verificando que la cuña del poste entre en la ranura de la manuja.

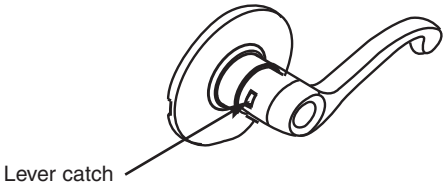

SARGENT®
ASSA ABLOY

ASSA ABLOY, the global leader in door opening solutions

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.