INSTRUCTIONS FOR SARGENT® 607 LOCKING SLIDE REPLACEMENT KIT

SARGENT
ASSA ABLOY

607-1 LOCKING SLIDE REPLACEMENT KIT (For all 713 ET Controls)

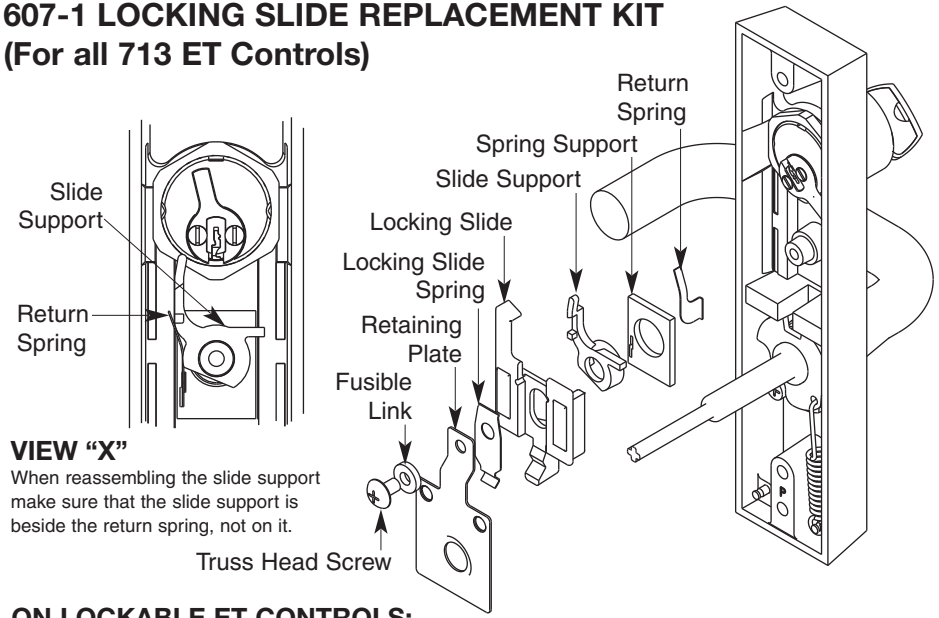

VIEW "X"

When reassembling the slide support make sure that the slide support is beside the return spring, not on it.

ON LOCKABLE ET CONTROLS:

1. Remove the truss head screw, fusible link, locking slide spring, retaining plate and locking slide.
2. Place the new locking slide over the slide support and return spring making sure that the slide support is beside the return spring. See View "X" for proper installation of slide support, spring support and return spring.
3. Align the locking slide spring, retaining plate, fusible link, and truss head screw and tighten securely.

607-2 LOCKING SLIDE REPLACEMENT KIT (For all 706 ET Controls)

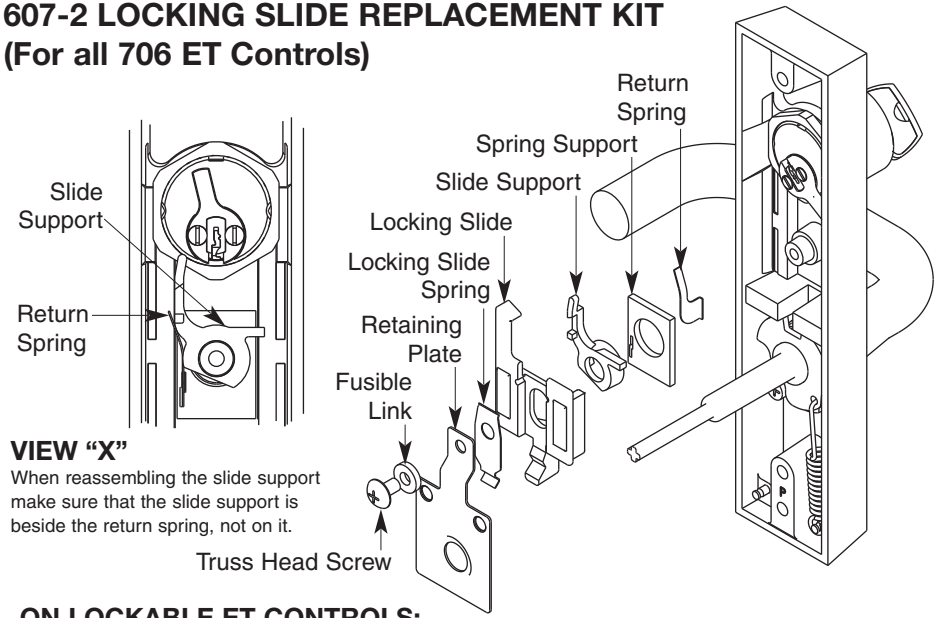

VIEW "X"

When reassembling the slide support make sure that the slide support is beside the return spring, not on it.

ON LOCKABLE ET CONTROLS:

1. Remove the truss head screw, fusible link, locking slide spring, retaining plate and locking slide.
2. Place the new locking slide over the slide support and return spring making sure that the slide support is beside the return spring. See View "X" for proper installation of slide support, spring support and return spring.
3. Align the locking slide spring, retaining plate, fusible link, and truss head screw and tighten securely.

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

INSTRUCTIONS FOR SARGENT® 607 LOCKING SLIDE REPLACEMENT KIT

SARGENT
ASSA ABLOY

607-3 LOCKING SLIDE REPLACEMENT KIT (For all 743 ET Controls)

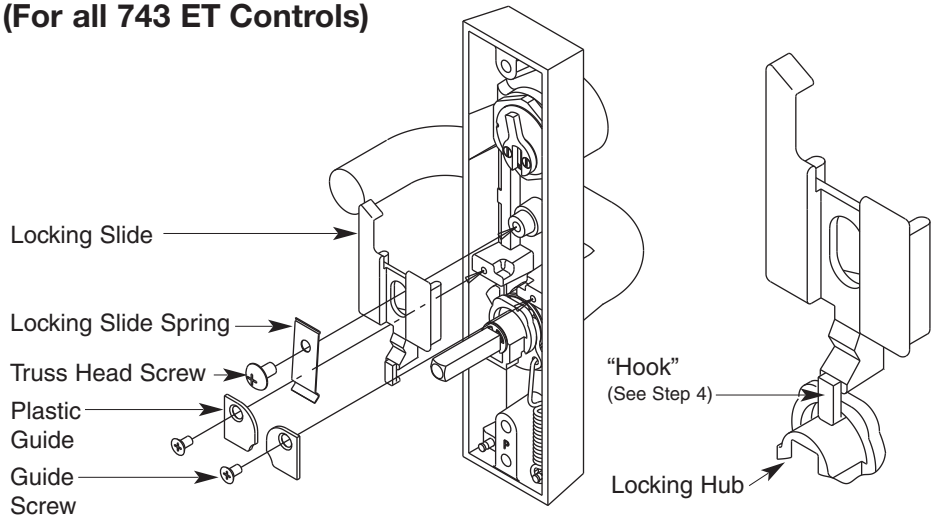

ON FREE WHEELING ET CONTROLS:

1. Remove and save the two plastic guides and the guide screws.
2. Remove and discard the truss head screw and slide spring.
3. Remove and discard the locking slide, noting how it was installed.
4. Place the new locking slide into the ET case. Be sure to put the "hook" of the slide into the slot of the locking hub.
5. Place the new spring on the slide as shown and align the hole in the spring with the post.
6. Install the truss head screw and tighten securely.
7. Reinstall the guides and guide screws as shown.

607-4 & 607-5 LOCKING SLIDE REPLACEMENT KIT (For all 746 ET Controls)

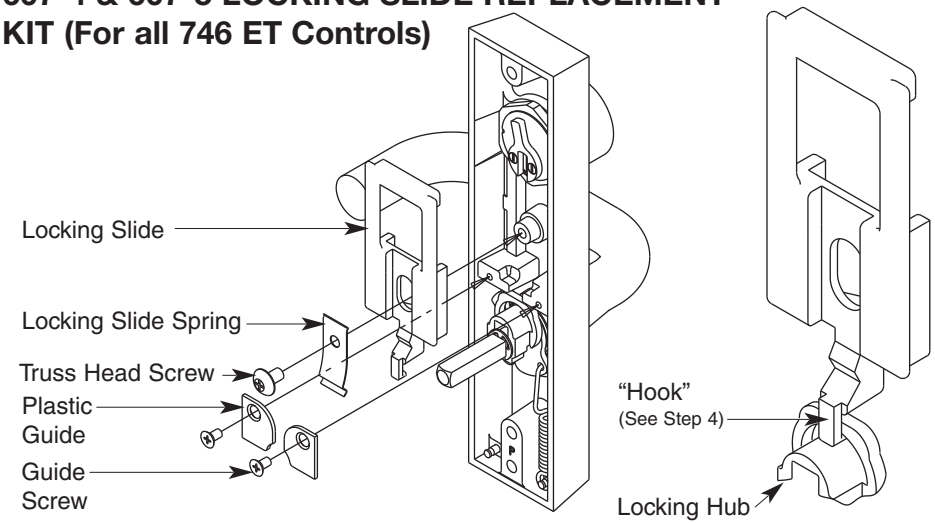

ON FREE WHEELING ET CONTROLS:

1. Remove and save the two plastic guides and the guide screws.
2. Remove and discard the truss head screw and slide spring.
3. Remove and discard the locking slide, noting how it was installed.
4. Place the new locking slide into the ET case. Be sure to put the "hook" of the slide into the slot of the locking hub. **NOTE:** The cylinder cam must point up for proper operation.
5. Place the new spring on the slide as shown and align the hole in the spring with the post.
6. Install the truss head screw and tighten securely.
7. Reinstall the guides and guide screws as shown.

ASSA ABLOY, the global leader in door opening solutions

Copyright © 2009, Sargent Manufacturing Company, an ASSA ABLOY Group company. All rights reserved.
Reproduction in whole or in part without the express written permission of Sargent Manufacturing Company is prohibited.

A7411B