


FURNISHED WITH TWO #8-32x3/4 UNDERCUT HEAD COMBINATION SCREWS.

DETAIL OF STRIKE BOX (REGULARLY FURNISHED)

- ④ WHEN DOOR SILENCERS ARE USED ON DOOR FRAME, LOCATE CENTERLINE OF STRIKE FROM SURFACE OF DOOR SILENCER AS SHOWN.
- ③ 1/16 LIP LENGTH REGULARLY FURNISHED FOR 1 3/8 DOORS & FRAMES.  
1/4 LIP LENGTH FURNISHED FOR 1 3/4 DOORS & FRAMES.  
FOR LENGTHS 1 1/2, 1 3/4 OR 2 FURNISHED WHEN ORDERED.
- ② DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.
- ① STRIKE OUTLINE FOR FRAME FITS CURRENT ANSI A115.2 STANDARD.

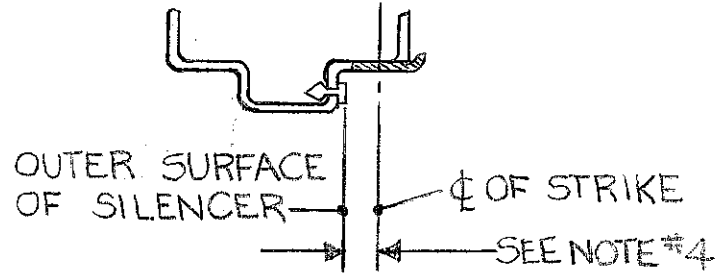

SARGENT & COMPANY		NEW HAVEN 9, CONN.	
TEMPLATE:		RELEASE DATE	
400 CURVED LIP STRIKE		12 AUG 87	
		TEMPLER NO.	
		4239 E	